

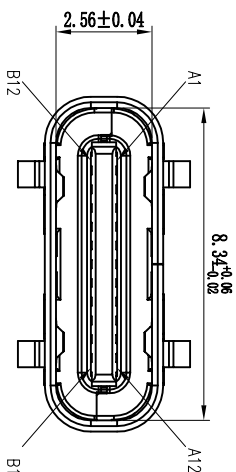
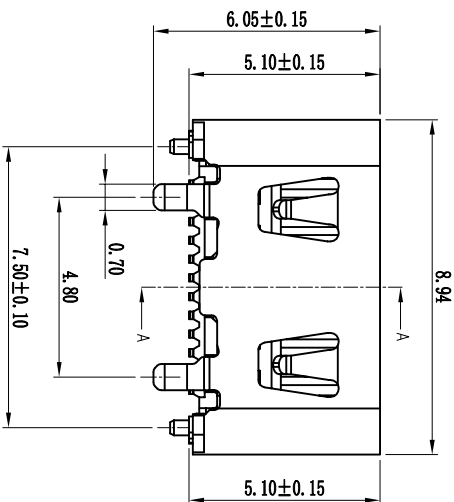
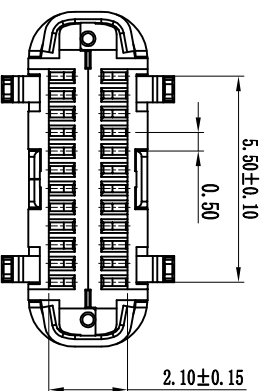
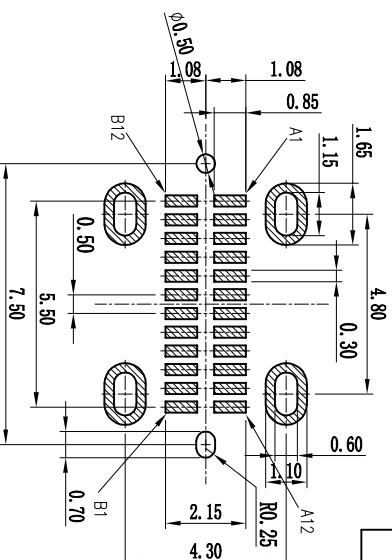


RoHS 客户图

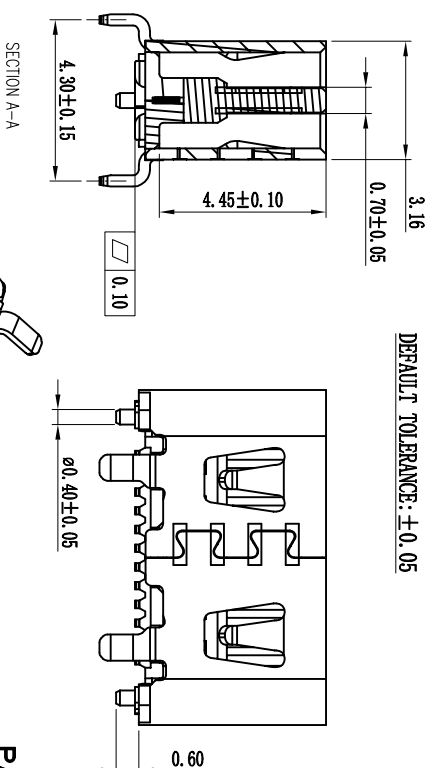

RECOMMENDED PCB LAYOUT (TOP VIEW)
DEFAULT TOLERANCE: ±0.05



USE TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	TX+	B11	ROT+
A3	TX-	B10	ROT-
A4	VBUS	B9	VBUS
A5	CS	B8	SRZ
A6	DP+	B7	DMZ
A7	DN+	B6	DMZ
A8	SRU	B5	CS2
A9	VBUS	B4	VBUS
A10	RZ+	B3	TC+
A11	RZ-	B2	TC+
A12	GND	B1	GND

产品图

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表				单位			
TOLERANCE UNLESS OTHERWISE SPECIFIED				MM			
A	±0.30	X	±5°	比例	1:1	制图	王冠
B	±0.25	X	±2°	审核	雷永健	产品料号	8001F-2400087-A
C	±0.20	XX	±1°	日期	2009/10/20	核准	雷永健
D	±0.15	XXX	±0.5°	DATE		Appd	廖永健

联系方式: mailbox: sale@xfle.com, www.xfle.com

PART NO: 8001F-2400087-A

SERIE: TYPE C | Receptacle | serial number | Variabler

目錄	修改內容	日期
MAPX	MODIFICATION	DATE
A0	NEW	19-10-20

1. 材料
A. 主体: LQ, 黑色/白色, UL 94-V0;
B. 端子: 高导电C025, 电镀刷金;
C. 外壳: 不锈钢304, 镀全镍;
D. 卡钩: 不锈钢304;
2. 主要特性
A. 电压等级: 20V AC;
B. 电流: 5A;
C. 工作温度: -40°~85° c;
3. 电气要求:
A. 接触电阻: 40mΩ Max. (初始), 50mΩ Max. (最后);
B. 电压: 100V AC 1分钟;
C. 绝缘电阻: 100MΩ min. DC 500V;
4. 机械性能:
A. 插入力: 5~20N. (从1~10,000次);
B. 拔出力: 8~20N. (从1~1,000次);
C. 耐久寿命: 10,000次;