

RoHS


客户图


目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

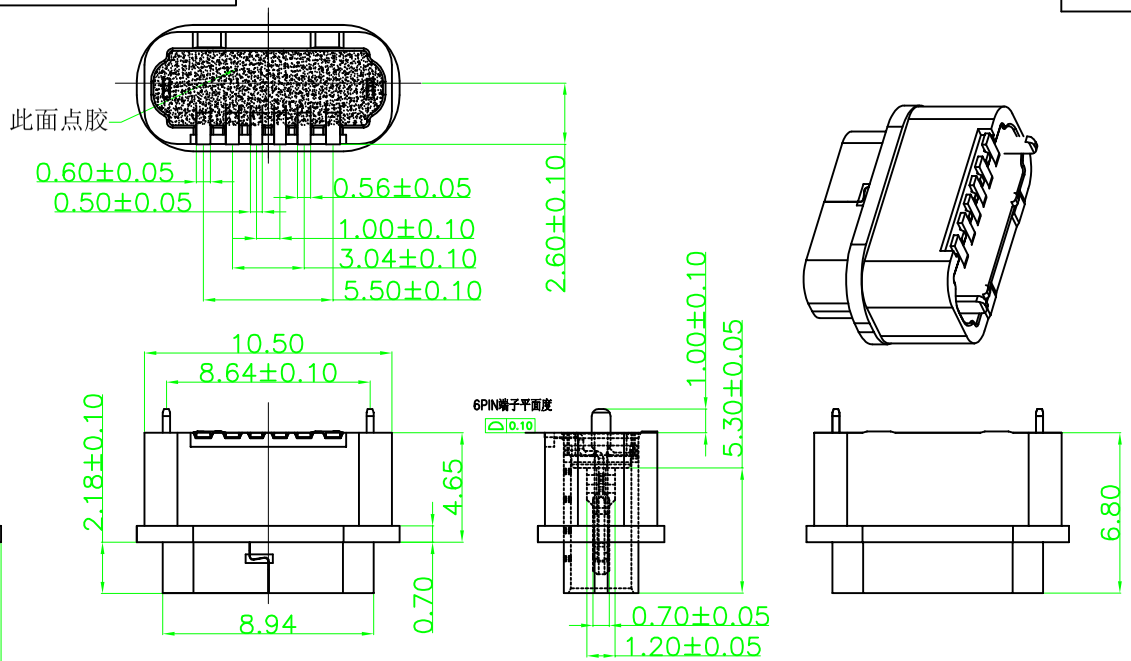


NOTES:
1. CURRENT RATING:
   3.0A MAX.
2. DIELECTRIC WITHSTAND VOLTAGE:
   100VAC.
3. TEMPERATURE RANGE:
   −30 °C ~ 85 °C.
4. CONTACT RESISTANCE:
   40 MILLIONHM MAX.
5. INSULATION RESISTANCE:
   100 MEGOHMS MIN.
6. INSERTION FORCE :
   5N~20N.
7. UNMATING FORCE:
   8N~20N.
8. DURABILITY:
   10,000 CYCLES.
9. WATERPROOF RATING: IPX7.
10. ALL PRODUCTS COMPLY WITH RoHS ENVIRONMENTAL REQUIREMENTS.



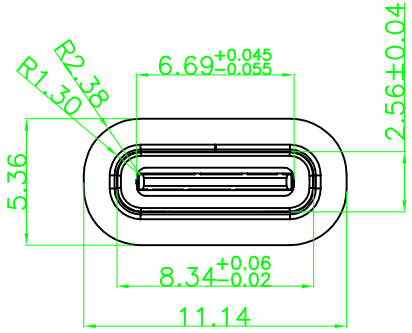


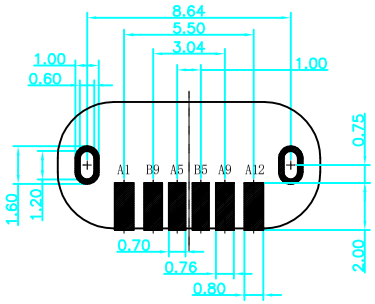

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

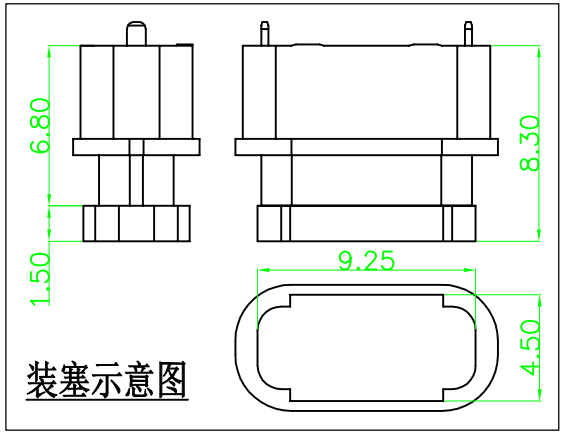

防水圈：建议防水圈尺寸

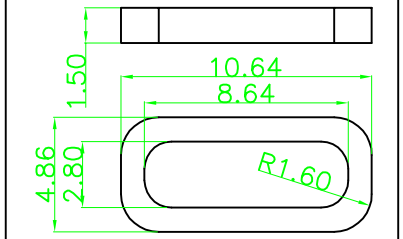

下压至0.80~1.00mm防水性能最佳

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图 PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°.	±5°
.X	±0.25	.X°	±2°
.XX	±0.30	.XX°	±1°
.XXX	±0.15	.XXX°	±0.5°

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

单位 UNITS	MM	制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.	8001F-FS06041-X
比例 SCALE	1:1	审核 CHKD	雷永健 Leiyongjian	产品名称 PRODUCT NO.	TYPE C 6P母座立式SMT 护套式防水 五金外露2.15 H=6.8
日期 DATE	2009/10/20	核准 APPD	雷永健 Leiyongjian	角法 VIEW	版本 VER A0

由 Autodesk 教育版产品制作
THIS DRAWING AND SPECIFICATIONS, WHETHER IN WHOLE OR IN PART, ARE PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION