
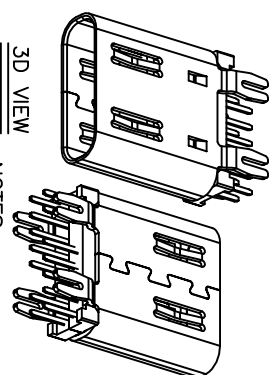
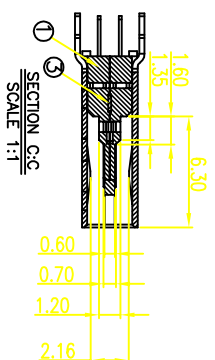


7	8	9	10
目録 MAPX	設定内容 MODIFICATION	日期 DATE	
A0	NEW	09-10-20	



NOTES:

- ## 1. ELECTRICAL REQUIREMENTS:

- 1.1: CURRENT RATING:3.0A MAX
- 1.2. VOLTAGE RATING:30VAC.
- 1.3. CONTACT RESISTANCE: 40 mΩ MAX.
AFTER DURABILITY: 50 mΩ MAX.
- 1.4. INSULATION RESISTANCE: 100 MΩ MIN.
- 1.5.WITHSTANDING STRENGTH: 100V AC

- ## 2. MECHANICAL REQUIREMENTS:







- 2.1: INSERTION FORCE : 5N~20N
2.2: EXTRACTION FORCE: INITIAL: 8~20N
AFTER DURABILITY:6~20N

- ### 3. ENVIRONMENTAL REQUIREMENTS:

- 3.1: OPERATING TEMPERATURE RANGE: $-40^{\circ}\text{C}\sim+80^{\circ}\text{C}$
3.2: STORAGE TEMPERATURE RANGE: $-40^{\circ}\text{C}\sim+80^{\circ}\text{C}$

4. MATERIAL: SEE TABLE 1

- 6.SOLDER ABILITY:260°C±5°C,5±0.5SECONDS

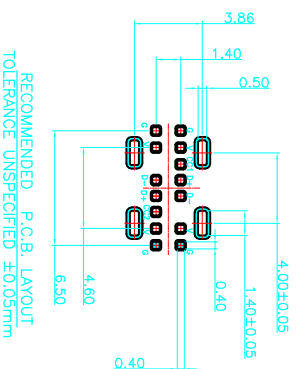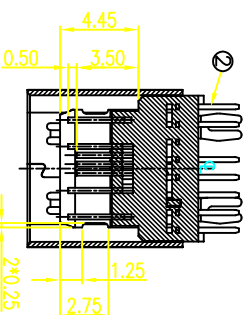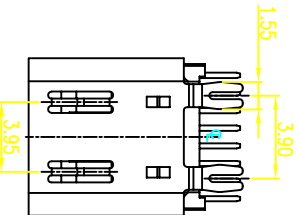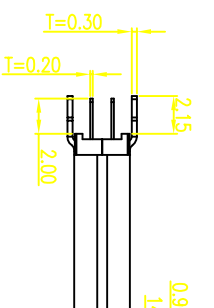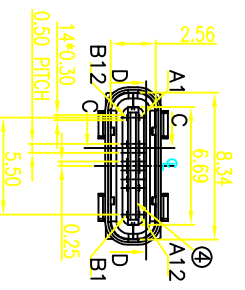

5	SHELL	SUS 304 T=0.30 mm	Ni:80u"~120u"	1 PCS
4	I/M 2	LCP UL94V-0	SEE TABLE 2	1 PCS
3	SHIELDING PLATE	SUS 304 T=0.20 mm	DO NOT USE FOR TIG WELDING	1 PCS
2	CONTACT	C5210 T=0.25 mm	CONTACT Au:1u" WELDING Au:1u"Ni:80u" Min	2 SET
1	I/M 1	LCP UL94V-0	SEE TABLE 2	1 PCS
NO.	DESCRIPTION	MATERIAL	COLOR/PLATING	QTY

A1	GND	B12	GND
/	/	/	/
/	/	/	/
A4	VBUS	B9	VBUS
A5	CC1	B8	SUB2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SUB1	B5	CC2
A9	VBUS	B4	VBUS
/	/	/	/
/	/	/	/
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产 品 图										深 圳 市 鑫 风 雷 电 子 有 限 公 司									
PRODUCT CHART DWG										Shenzhen xinfenglei Electronic Co., Ltd									
公差一览表										单位									
TOLERANCE UNLESS OTHERWISE										MM									
X ±0.50 X ±0.50 X ±0.50 X ±0.50										比例									
.X ±0.25 .X ±0.25 .X ±0.25 .X ±0.25										1:1									
.XX ±0.15 .XX ±0.15 .XX ±0.15 .XX ±0.15										日期									
.XXX ±0.15 .XXX ±0.15 .XXX ±0.15 .XXX ±0.15										2009/10/20									
DATE										核准									
APPD										雷永健									
角法										产品料号									
VIEW										24006-UCAFO01-X									
☉										TYPE C 14P 180度插板=10.0									
☐										版本									
VER										40									

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION