
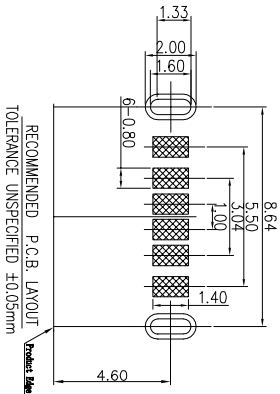







12345678910

RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



NOTE:

1.MATERIAL SPECIFICATION:

1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.

2.CONTACTS:COOPER ALLOY

3.MID PLATE: STAINLESS STEEL

4.FRONT SHELL: STAINLESS STEEL

2.PLATING SPECIFICATION:

2-1.CONTACTS:

Ni 50u" MIN. UNDER PLATED OVER ALL.

Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.

(GOLD PLATING THICKNESS FOLLOW THE P/N)

PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N

2-2.FRONT SHELL:

SEE TABLE1.
2-3.SHIELD PLATE&EMI PLATE:
CLEAR ONLY

3.MECHANICAL PERFORMANCE

3-1.INSERTION FORCE: 0.5~2.0kgf.

3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.

3-3.DURABILITY: 5000 CYCLES.

4.ELECTRICAL PERFORMANCE:

4-1. CURRENT RATING:3.0A

VOLTAGE RATING:5.0V

4-2. LCR:

VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.

SHIELD: 50mΩ/MAX.

LCR MAX. CHANGE OF ALL PINS: 10mΩ.

4-3.INSULATION RESISTANCE: 100MΩ MIN

4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -25℃~+85℃.

6.IR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260℃.

PIN ASSIGNMENTS

A5	CCI	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图

PRODUCT CHART DWG





公差一览表

公差一览表	单位	MM	制图	王冠	产品料号	00203-UCAF001-X
TOLERANCE UNLESS OTHERWISE	UNITS		DRAWING		产品名称	TYPE C 6P母座后两脚SMT L=5.0
X. ±0.30	X'. ±5°	比例	1:1	审核	雷永健	角法
X. ±0.25	X'. ±2°	日期	2009/10/20	核准	雷永健	版本
.XXX ±0.15	.XXX' ±0.5°	DATE	2009/10/20	APRD	VIEW	A0

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

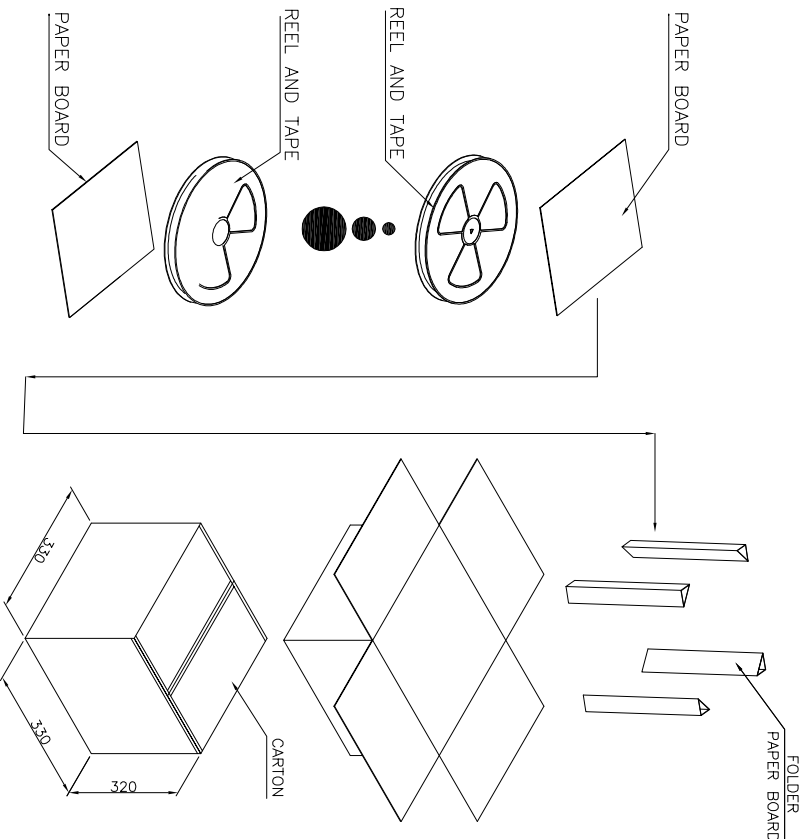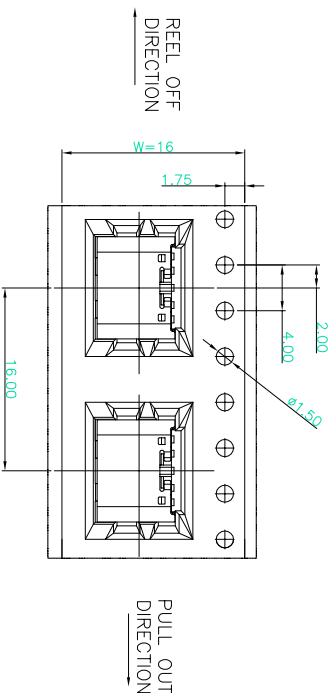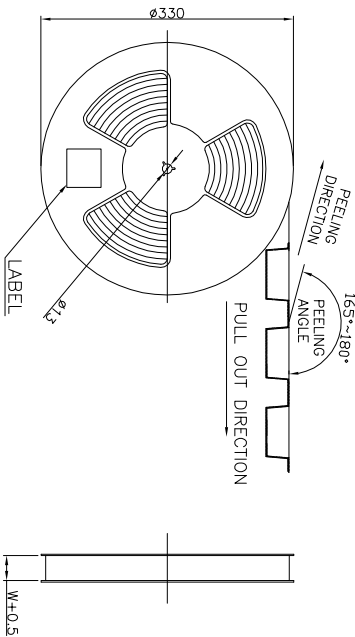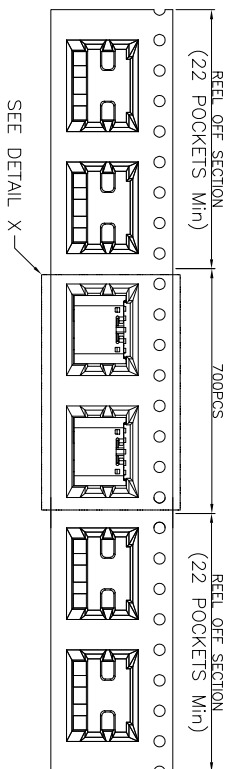

CONNECTOR (PCS)	REEL	CARTON
	1000	10000

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	00203-UCAF001-X
X	±0.30	X'	±5'	比例 SCALE	1:1	审核 CHKD	雷永健
.X	±0.25	.X'	±2'	日期 DATE	2009/10/20	核准 APPD	雷永健
.XX	±0.30	.XX'	±1'	角法 VIEW		版本 VER	A0
.XXX	±0.15	.XXX'	±0.5'				