

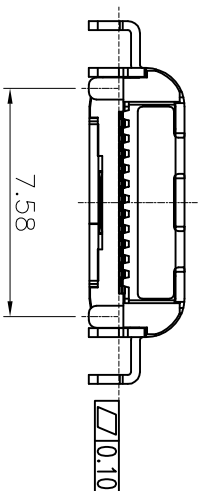
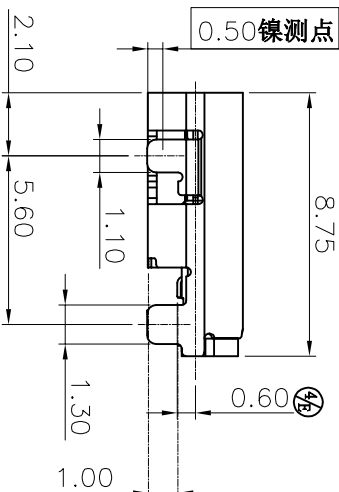
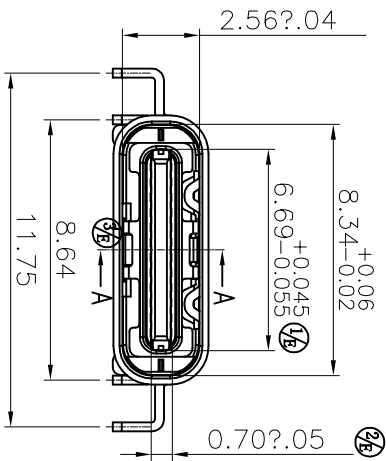
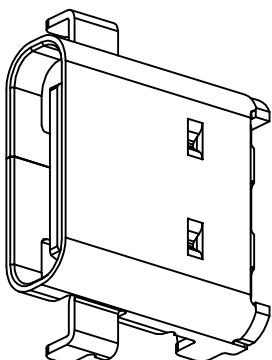


RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

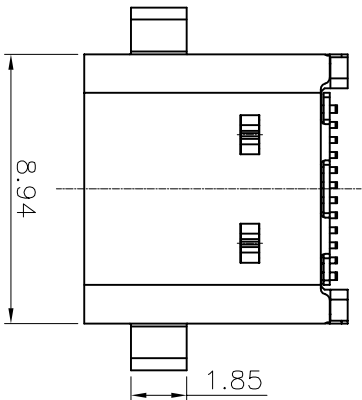

- NOTES:
- 1.MECHANICAL PERFORMANCE,
1-1.INSERTION FORCE: 5N~20N,
1-2.REMOVAL FORCE: 5N~20N,
1-3.DURABILITY: 10000 CYCLES.
 - 2.ELECTRICAL PERFORMANCE,
2-1. CURRENT RATING:3.0A
VOLTAGE RATING:5.0V
2-2. LCRR:VBUS & GND PINS AND OTHER
PINS: 40mΩ/PIN MAX.SHIELD: 50mΩ/MAX.
2-3.INSULATION RESISTANCE: 100MΩ MIN
2-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V
FOR 1 MINUTE.
 - 3.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.

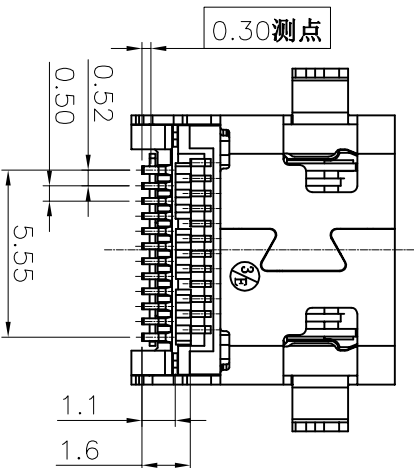

产品图

PRODUCT CHART DWG



公差一览表

公差一览表				深圳市鑫风雷电子有限公司			
TOLERANCE UNLESS OTHERWISE				Shenzhen xinfenglei Electronic Co., Ltd			
X	±0.30	X'	±5°	单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.	26011-UCAF002-X
X	±0.25	X'	±2°	比例 SCALE	审核 CHKD	产品名称 PRODUCT NO.	TYPE C 24P沉板1.0 CH=0.6 L=8.75
.XX	±0.30	.XX'	±1°	日期 DATE	核准 APRD	角法 VIEW	版本 VER
.XXX	±0.15	.XXX'	±0.5°	2009/10/20	雷永健		A0

12345678910

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

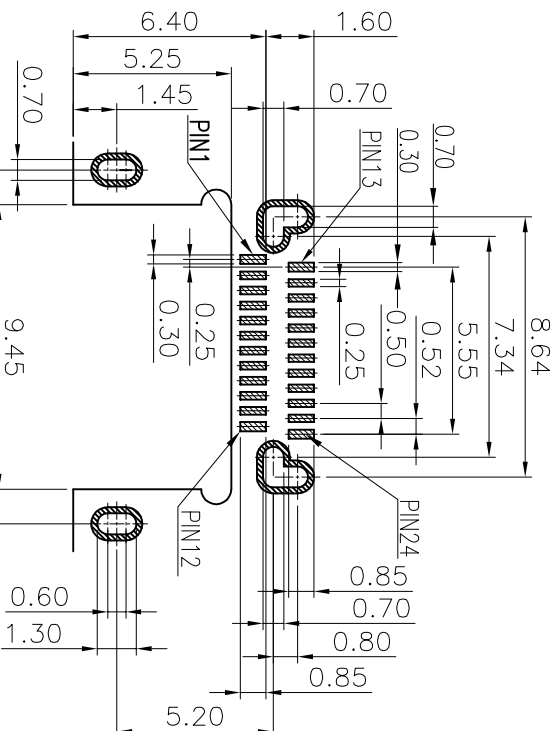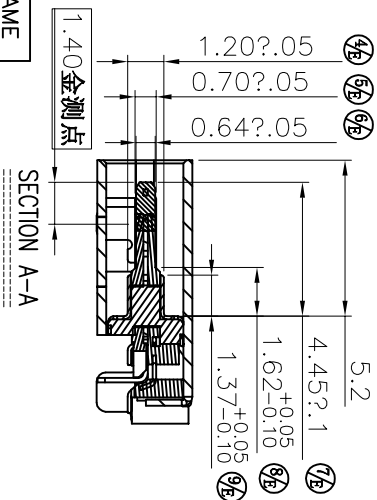

RECOMMENDED PCB LAYOUT

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

NO.	PART NAME	MATERIAL	FINISH
5	EMI SPRING	SUS304R-1/2H T=0.10	Cleaning
4	MID-PLATE	SUS301R-H T=0.15	Plating Ni 50u"Min.
3	OUTER SHELL	SUS304R-1/2H T=0.30	Plating Ni 50u"Min. Overall
2	TERMINALS	C18140-H T=0.12	Contact Area Plating Au See table, 80u"Ni Overall, Soldering Tail Plating Matte-Tin 120u" Min.
1	HOUSING	LCP+30%GF	Black, UL 94V-0

产品图				深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG				Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表				单位	MM	制图	王冠
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING	
X	±0.30	X'	±5°	比例	1:1	审核	雷永健
.XX	±0.25	.X'	±2°	SCALE		CHKD	
.XXX	±0.15	.XXX'	±0.5°	日期	2009/10/20	核准	雷永健
				DATE		APPR	
				产品料号	26011-UCAF002-X	产品名称	
				PRODUCT PART NO.		PRODUCT NO.	
				角法	TYPE C 24P沉板1.0 CH=0.6 L=8.75	版本	A0
				VIEW		VER	