

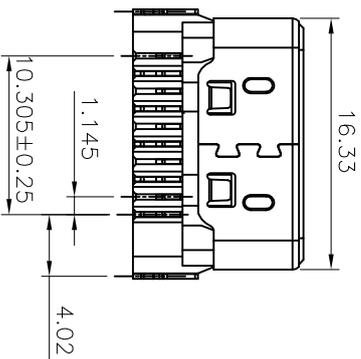
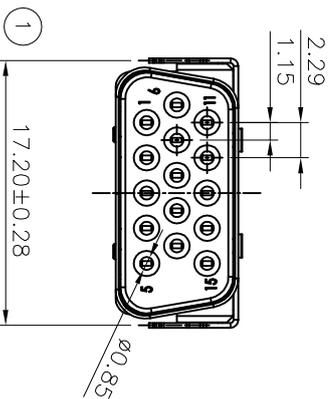


ROHS 客户图


目錄 MAPX 40	變更內容 MODIFICATION NEW	日期 DATE 19-10-20
------------------	-----------------------------	------------------------

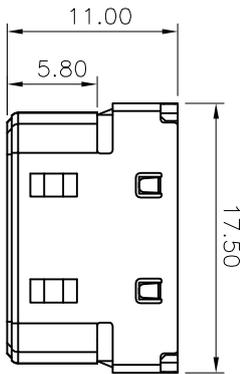



PART NO: 8019F-0000001-X
 SERISE: D-SUB
 Receptacle
 serial number
 Variabler

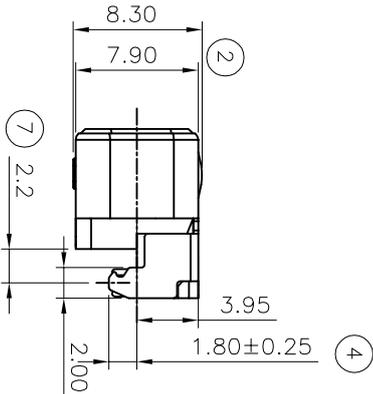

鱼叉脚位尺寸

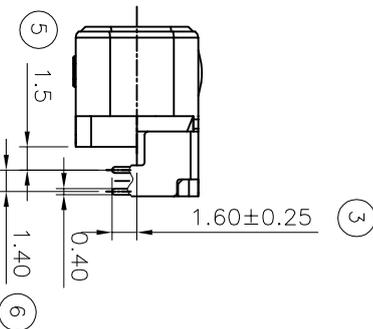

锡脚脚位尺寸

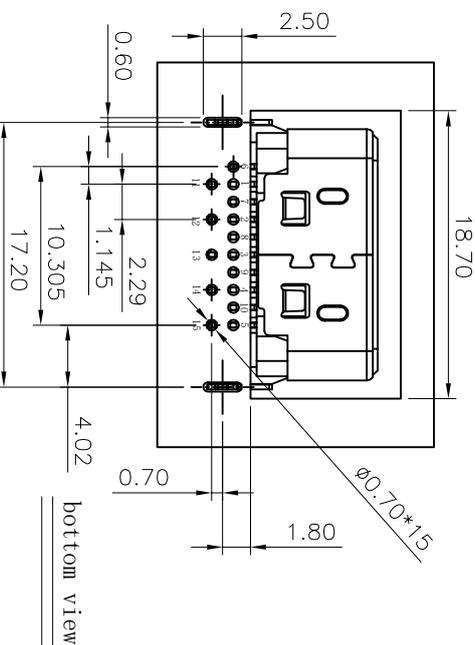

材料:Material:

特性:Specifications:
 电器 Electrical:
 接触阻抗:Contact Resistance
 30 mΩ MAX
 耐电压:dielectric Withstanding Voltage:
 500V AC
 绝缘阻抗:Insulation Resistance:
 1000 MΩ MIN
 Working temperature:-30° ~+85°
 插入力MAX: 4.5kgf Max.
 拔出力MIN: 0.45kgf Min.

塑胶: LCP BLACK
 端子: Contact:C2680
 Plated gold in Mating Area:
 Tin/Lead on Solder Tails
 外壳:Shell: SPOC

产品图

深圳市鑫风雷电子有限公司
 Shenzhen xinfenglei Electronics Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	MM	制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.	8019F-0000001-X
X	±0.30	X'	±5'	审核 CHKD	雷永健 Lei Yongjian	产品名称 PRODUCT NO.	Mini D-SUB母座 反向 沉板居中 L=11.0
X	±0.25	X'	±2'	日期 DATE	2009/10/20	联系方式 MAILBOX/WEB	mailto:sale1@xfll.com www.xfll.com.com
XX	±0.20	XX'	±1'	核准 APPD	雷永健 Lei Yongjian		
XXX	±0.15	XXX'	±0.5'				