
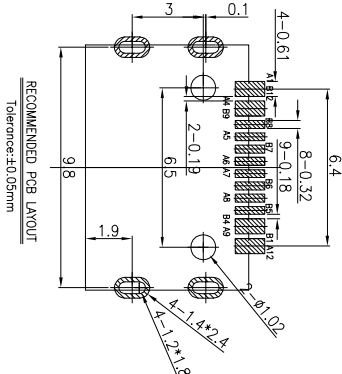
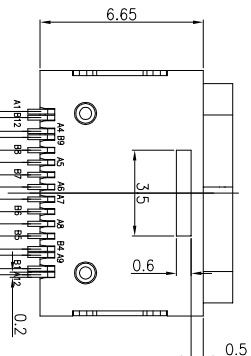
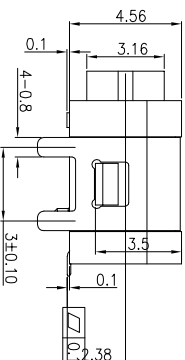
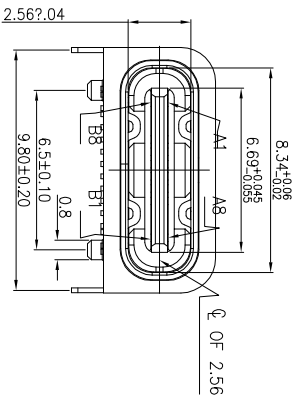



客戸図

目錄 MAPX	AO
------------	----

NEW
MODIFICATION

日期 DATE	09-10-20
------------	----------

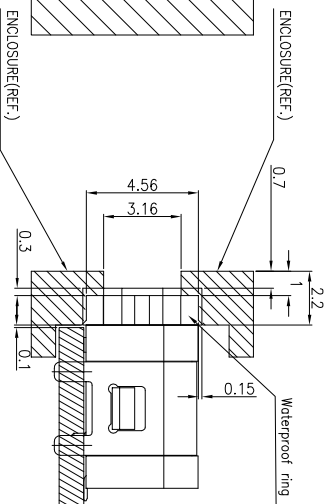

RECOMMENDED SCHEMATIC DRAWING OF CONNECTOR MATCH CHASSIS

NOTES:
SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 30 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 6N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX8(1.5M 30min)

＜防水等級IPX7 1.5米深 30分钟＞

PART NO.: 8001F-FS16013-X

SERISE: TYPE C

Receptacleserial number

Variablen

6	Run-RING	1PCS	Silica gel	BLACK
5	SHELL	1PCS	STAINLESS STEEL	IN Plated 60u"MIN
4	SHIELDING PLATE	1PCS	STAINLESS STEEL	IN Plated 60u"MIN
3	CONTACT	1SET	Bross	Contact Pinning Au (1u"-3u") Soldering Pinning: Au (1u"-3u")
2	SHELL HOUSING	1PCS	LCP	BLACK
1	HOUSING	1PCS	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	REMARKS

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME
A1	GND
A4	VBUS
A5	CC1
A6	Dp1
A7	Dn1
A8	SRU1
A9	VBUS
A12	GND

PIN NUMBER	SIGNAL NAME
B12	GND
B9	VBUS
B8	SRU2
B7	Dn2
B6	Dp2
B5	CC2
B4	VBUS
B1	GND

产品图



PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED		比例	日期	核准	角法	版本
UNITS		SCALE	DATE	APPROVED	VIEW	VER
MM		1:1	2009/10/20	雷永健		AO
DRAWING NO.		审核	审核	产品名称	TYPE C 160 母座板上 SMT 防水型 Chi-2.38 L=7.85	
8001F-FSI6013-X		CHKO	雷永健	PRODUCT NO.		
产品料号						

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

目録 MAPX	設定内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

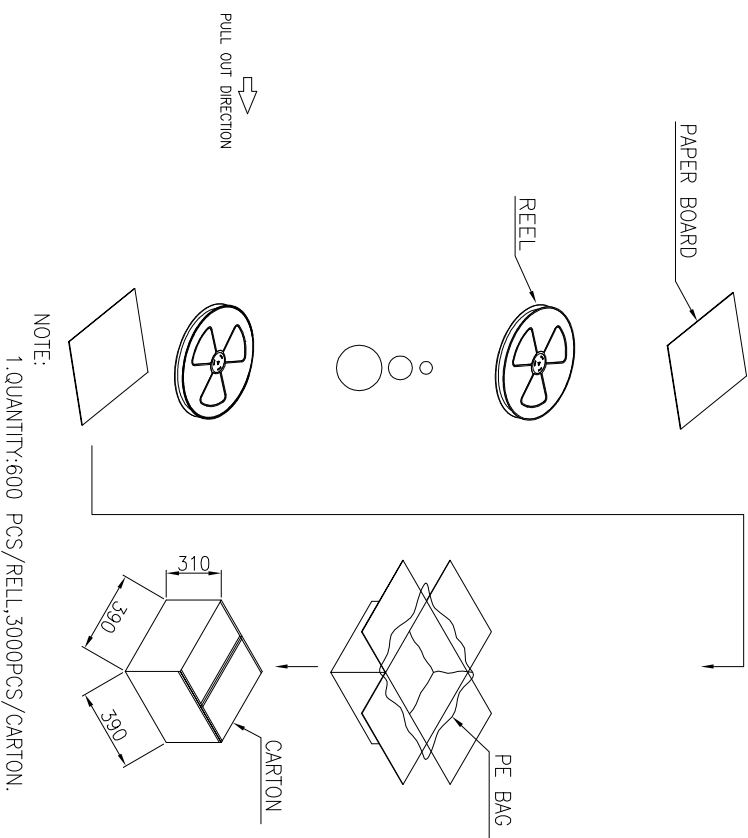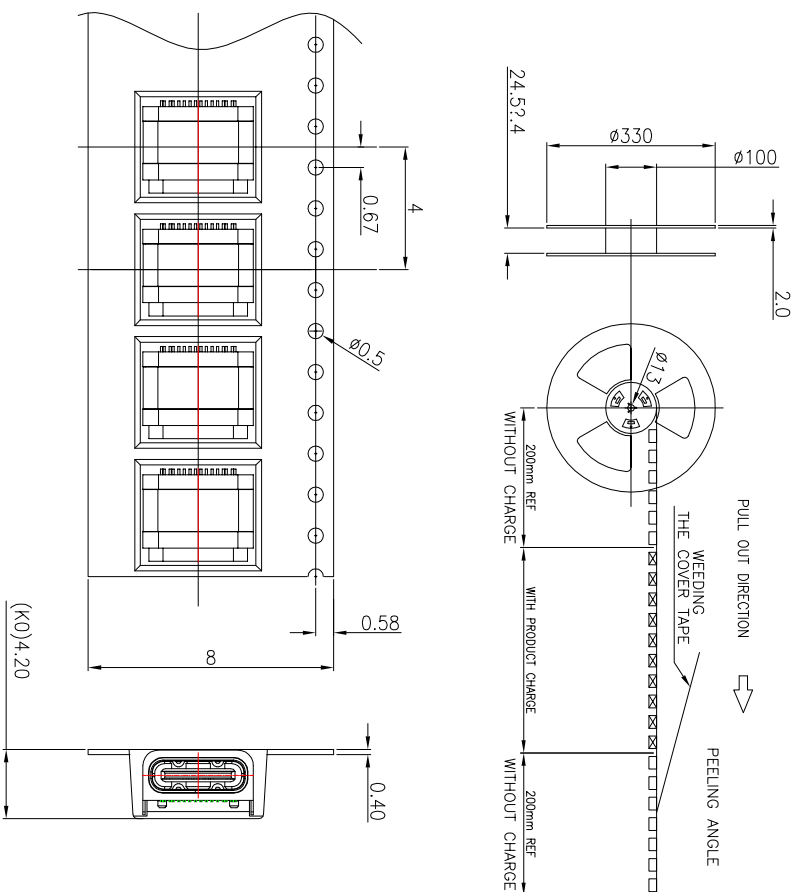

NOTE:
1.QUANTITY:600 PCS/REEL,3000PCS/CARTON.

注意:

1. 材料:

纸箱: 纤维板, 瓦楞, 双层壁。

胶带: 聚苯乙烯, 耐热温度: 120℃, 白。

卷筒: 聚苯乙烯, 耐热温度: 70℃, 蓝色。

包装: 聚乙烯, 耐热温度: 100℃。

2. 剥离强度: 0.1 ~ 1.3 N (10 ~ 130克)

3. 脱皮速度: 300mm / min。

4. 每个袋子都应包括干燥剂*1。

5. 外箱上贴物料标签及RoHS标签

6. 同一产品只能装同一纸箱, 不允其它产品;

7. 包装后, 产品砌合面朝内;

产品图		深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG		Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO	
X.	±0.30	X.	±5°	产品名称 PRODUCT NAME	8001F-TS16013-X
.X	±0.25	.X	±2°	产品规格 PRODUCT SPEC	TYPE C 1601每座板上SMT 防水型 CH-2.38 L=7.65
.XX	±0.30	.XX	±1°	角法 VIEW	
.XXX	±0.15	.XXX	±0.5°	版本 VER	AO
日期 DATE		2009/10/20			
核准 APPD		雷永健			