
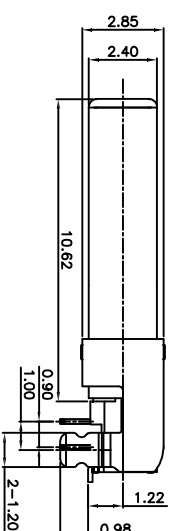

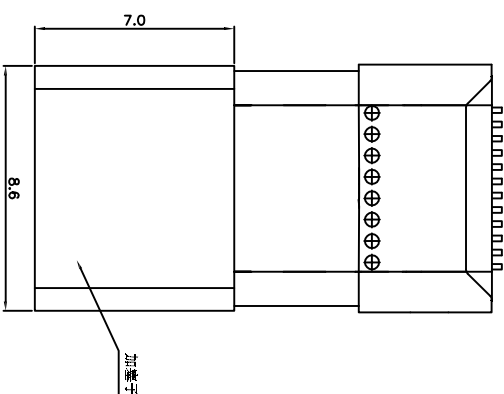


目錄
MAPX
AO

NEW
MODIFICATION

日期 DATE	09-10-20
------------	----------

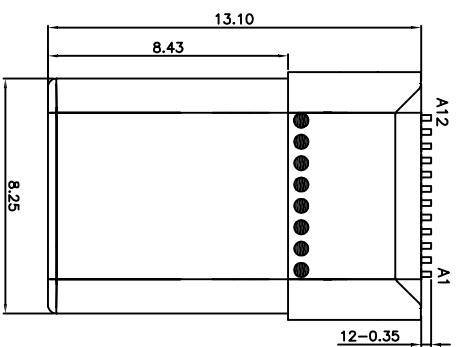

1. 材质

胶芯：(见料号说明)。

IMD A面&B面: LCP E130i 黑色。

CONTACT: COPPER ALLOY C7025

GND: STAINLESS STEEL SUS.




LATCH: STAINLESS STEEL SUS.

FRONT SHELL: STAINLESS STEEL, SUS



2. 电镀:

CONTACT: 接触区镀金(见料号说明), 镍底40u"MIN 焊锡区镀锡50u"MIN.

SHELL: 镀镍30u"MIN.

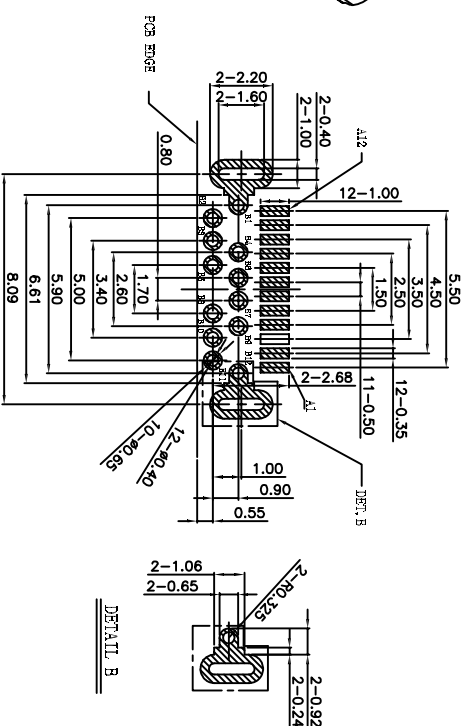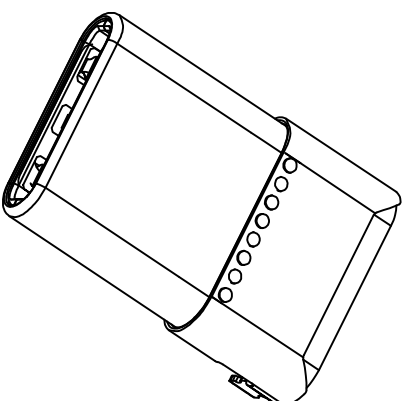

DETAIL B

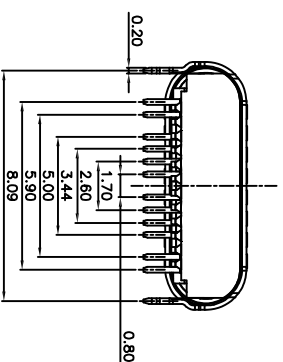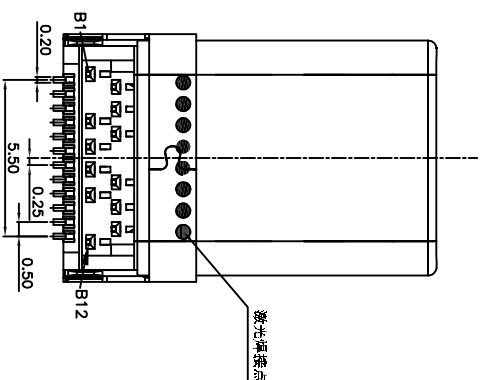

A1	GND	B12	GND
A2	TXp1	B11	Rxp1
A3	TXn1	B10	RXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn1
A7	Dn1	B6	Dp1
A8	SBU1	B5	VCONN
A9	VBUS	B4	VBUS
A10	RXn2	B3	TXn2
A11	Rxp2	B2	TXp2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产 品 图				深圳市鑫风雷电子有限公司					
PRODUCT CHART DWG				Shenzhen xinfenglei Electronic Co., Ltd					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	8001M-2400048-X
X.	±0.30	X.	±5°	比例 SCALE	1:1	审核 CHECK	雷永健	产品名称 PRODUCT NO.	Type C 20公寸拉板板上型前面后盖 Q1= 2 L=1.3.
.XX	±0.30	.XX	±1°	日期 DATE	2009/10/20				
.XXX	±0.15	.XXX	±0.5°	核准 APPRO	雷永健				
				画法 VIEW					
				版本 VER	A0				